


## AN ISO 9001:2000 COMPANY

PUSH SWITCH 2Pole 2Way Specifications: RoHS Compliant Part code: PS-2280-SL = Push to ON, Push to OFF locking switch Part code: PS-2280-NL = Push to ON, Momentary switch

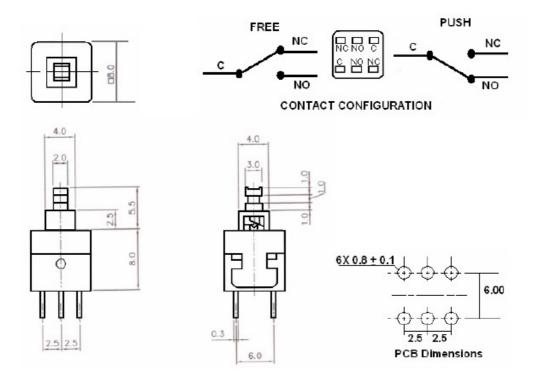

## **PUSH SWITCH 2Pole 2Way Specifications:**

- 1. Operating force:  $180 \pm 50$ gf
- 2. Full Travel:  $2.5 \pm 0.2$  mm, Lock Travel  $1.5 \pm 0.2$ mm
- 3. Contact material: Phosphor Bronze silver plated
- 4. Operating life: Minimum 10,000 cycles
- 5. Rating: 30V DC 100mA
- 6. Contact resistance: 30 milli Ohms maximum
- 7. Insulation resistance: 100 Mohms at 500VDC
- 8. Proof Voltage: 500 VAC for 1 minute
- 9. Operating Temperature: -20 to 85 Deg. C
- 10.Tolerance: +0.2mm