



Miniature Tact Switches: 3.5 X 6 - Type 60-1000


3.5 X 6 Standard

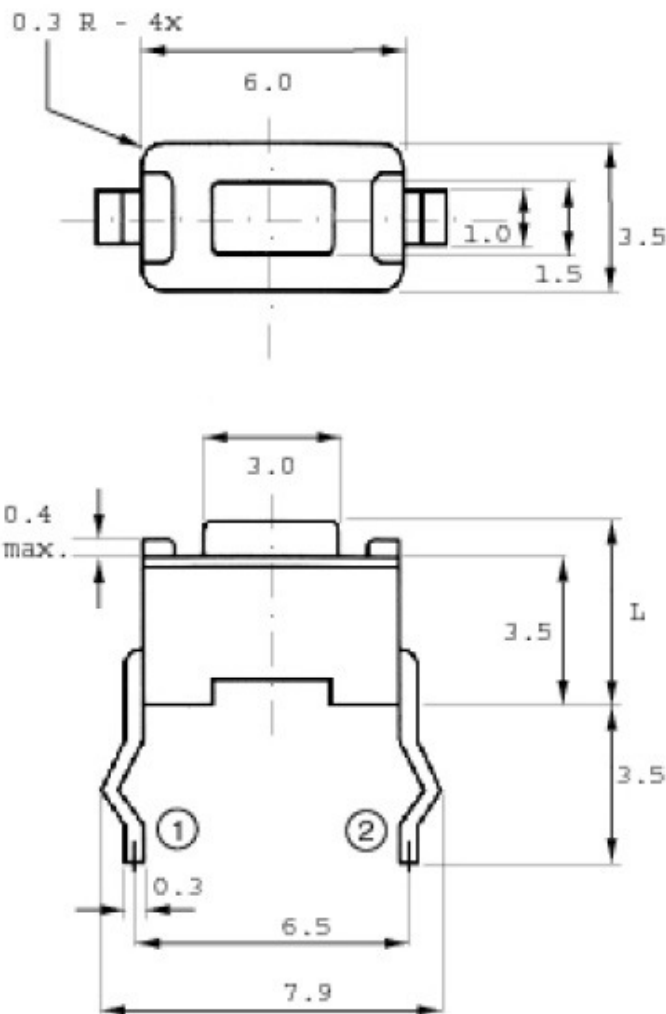

Circuit Diagram (For both)

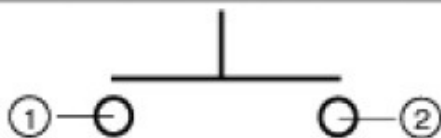


PCB Mounting Holes - Standard

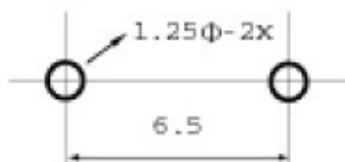


Switch Code

Knob Height L:	4.3	5.0
Operating Force	130	180
Operating Gram	260	260
Switch Code	60-1S1A 60-1S5A 60-1S3A	60-1S1B 60-1S5B 60-1S3B

3.5 X 6 Straight Leads

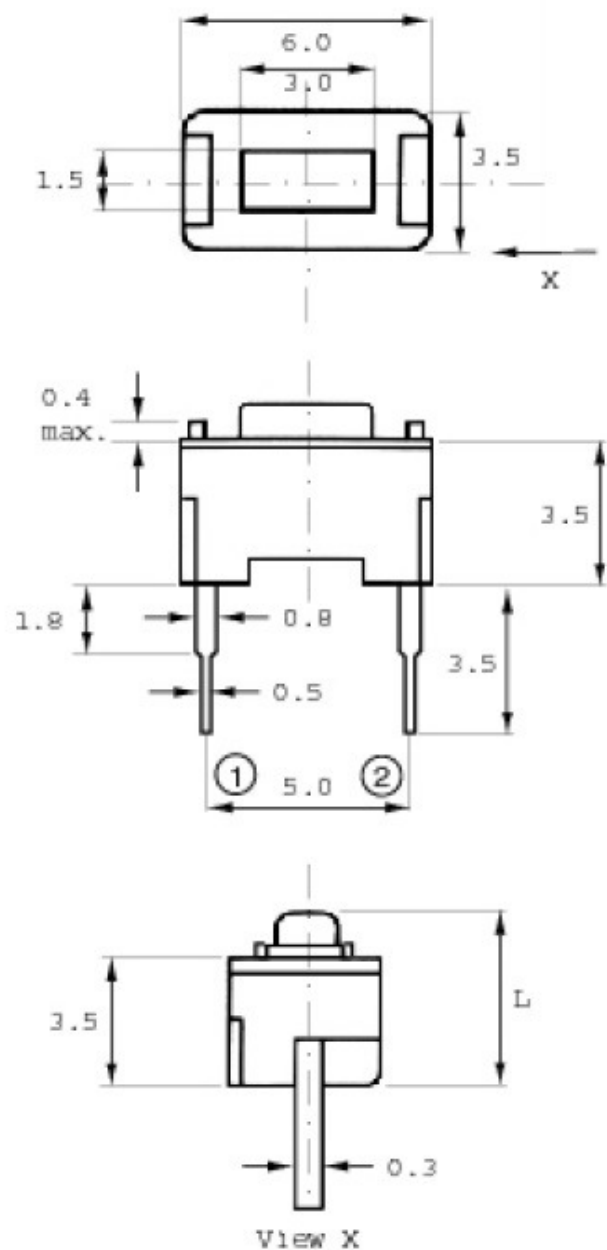

PCB Mounting Holes - Straight Leads

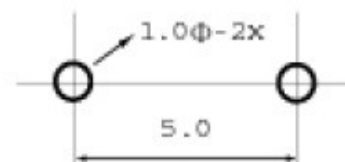

Switch Code

Knob Height L:	4.3	5.0
Operating Force	130	180
Operating Gram	260	260
Switch Code	60-1A1A 60-1A5A 60-1A3A	60-1A1B 60-1A5B 60-1A3B

CONTACT	: METAL
RATING	: 50 mA x 12 V DC
CONTACT RESISTANCE	: 100 mΩ MAX
PROOF VOLTAGE	: 250 V AC FOR 1 MIN
INSULATION RESISTANCE	: 100 MΩ MIN/100 V DC
OPERATING LIFE	: 35,000 CYCLES



PRODUCT: MINIATURE TACT SWITCH 60-1000

DIMENSIONS: MM TOLERANCE: + 0.2 MM

CHECKED BY:

DATE:

APPROVED BY:

DATE:



Pran Electronics Pvt. Ltd.

52 G.I.D.C. Makarpura Vadodara 390 010, INDIA.
Phone: [0265] 263 291 6 / 5920. Fax: 263 591 8.
Email: info@pranelectronics.com